



[www.hy-lok.com](http://www.hy-lok.com)

Catalog No. H-700T  
Apr. 2011

# Check Valves

700, 700H, 701, 700A Series



## Feature


- Pressure rating up to 6000psig(413bar) @ 70°F(21°C) - 700H Series  
3000psig(206bar) @ 70°F(21°C) - 700, 701, 700A Series
- Temperature rating up to 375°F(191°C) with FKM seal
- Suitable for gas and liquid
- SS316 body material as standard
- 100% factory tested for cracking and reseal



**HY-LOK CORPORATION**

© 2011 HY-LOK CORPORATION All rights reserved

## 700 Series

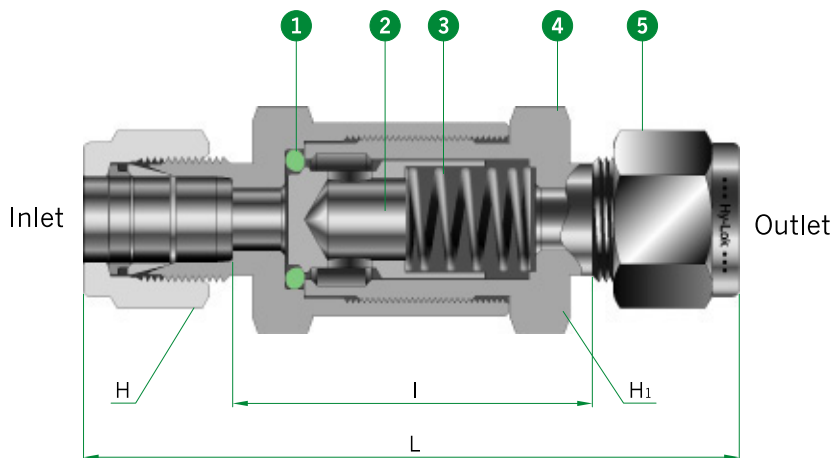

- 1 O-Ring**
  - provides leak tight shut - off.
- 2 Back Stopped Poppet**
  - prevents the spring from being overstressed.
- 3 Variety of Springs**
  - are available for the cracking pressure in the range from 1/3 psig to 100psig.
- 4 Wide Range of Body Sizes**
  - allow Cv choices from 0.16 to 8.0
- 5 Variety of End Connections**
  - include Hy-Lok tube fittings, male/female NPT tapered threads, male/female ISO tapered threads.

## Technical Data


Series	CV1	CV2 CV3 CV4	CV5 CV6
Max. Working Pressure @ 70°F (21°C)	3000 psig (206barg)		2000 psig (137barg)
Operating Temperature Range	FKM : -10°F to 375°F (-23°C to 191°C) NBR : -10°F to 250°F (-23°C to 121°C)		
Nominal Cracking Pressure	1/3, 1, 3, 10, 25, 100 psig		1/3, 1, 3, 10, 25 psig

## Table of Dimensions

Basic Part No.	Orifice	Cv	End Connections		Dimensions			
			Inlet	Outlet	L	I	H (Nut Hex)	H <sub>1</sub> (Body Hex)
CV1	4.8	0.16	1/8" Hy - Lok	1/8" Hy - Lok	55,6	30,2	11,1	15,9
			1/8" Male NPT	1/8" Male NPT	44,4	-	-	
			1/8" Female NPT	1/8" Female NPT	46,6	-	-	
			1/4" Hy - Lok	1/4" Hy - Lok	60,0	29,5	14,3	
		0.47	6mm Hy - Lok	6mm Hy - Lok	-	29,4	14,0	19,1
			1/4" Male NPT	1/4" Hy - Lok	56,4	-	14,3	
			1/4" Male NPT	1/4" Male NPT	53,4	-	-	
			1/4" Female NPT	1/4" Female NPT	54,6	-	-	
CV2	7.1	1.48	3/8" Hy - Lok	3/8" Hy - Lok	74,8	41,3	17,5	22,2
			10mm Hy - Lok	10mm Hy - Lok		40,4	19,0	
			3/8" Male NPT	3/8" Male NPT	64,6	-	-	
CV3	10.0	1.70	3/8" Female NPT	3/8" Female NPT	63,8	-	-	22,2
			1/2" Hy - Lok	1/2" Hy - Lok	80,2	34,5	22,2	
			12mm Hy - Lok	12mm Hy - Lok	-	34,6	22,0	
			1/2" Male NPT	1/2" Male NPT	74,4	-	-	
CV4	13.5	2.60	1/2" Female NPT	1/2" Female NPT	84,7	-	-	28,6
			5/8" Hy - Lok	5/8" Hy - Lok	91,8	48,1	25,4	
CV5	16.0	5.20	3/4" Hy - Lok	3/4" Hy - Lok	110,7	61,9	28,6	31,8
			3/4" Male NPT	3/4" Male NPT	105,3	-	-	
			3/4" Female NPT	3/4" Female NPT	103,0	-	-	
CV6	18.0	8.00	1" Hy - Lok	1" Hy - Lok	121,2	58,7	38,1	34,9
			1" Male NPT	1" Male NPT	116,2	-	-	
			1" Female NPT	1" Female NPT	111,4	-	-	


All dimensions in millimeters. Dimensions shown with Hy - Lok nuts in finger - tight position, where applicable.

## Materials of Construction

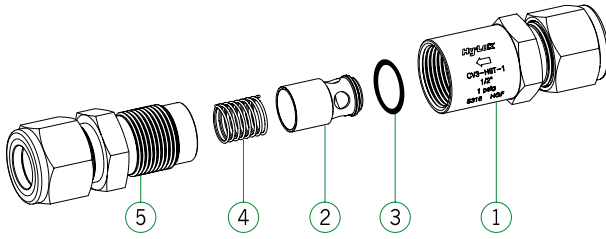

No.	Component	Valve Body Materials	
		Material Grade / ASTM Specification	
1	Inlet Body	TP316 / A479 or A276	BRASS
2	Poppet	TP316 / A479 or A276	BRASS
3	O-Ring	FKM	
4	Spring	SS302	
5	Outlet Body	TP316 / A479 or A276	BRASS

Molybdenum dry film lubricant is used for outer body made of 316SS  
Silicone based lubricant is used for poppet.

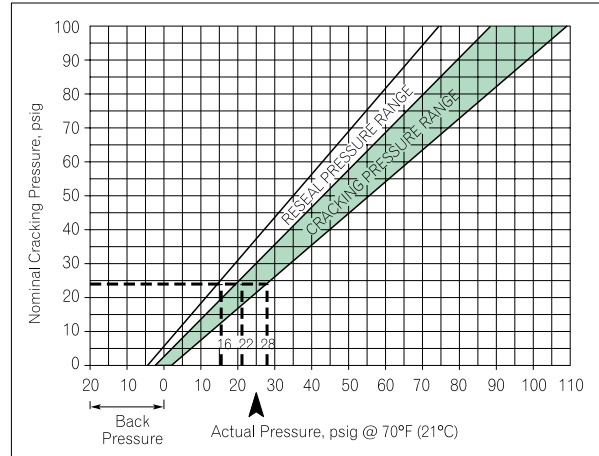





### Cracking and Reseal Pressure

- From the graph, the actual cracking pressure of nominal 25psi is shown to range between 22psi to 28psi, and the reseal pressure 16psi to 22psi.


**Back pressure** may be required to reseal the valves with nominal cracking pressure of 5psi or lower.

- Cracking pressure : The upstream pressure at which the first indication of flow occurs.
- Reseal pressure : The upstream pressure at which there is no indication of flow.

## Flow Rate at 70°F (20°C)

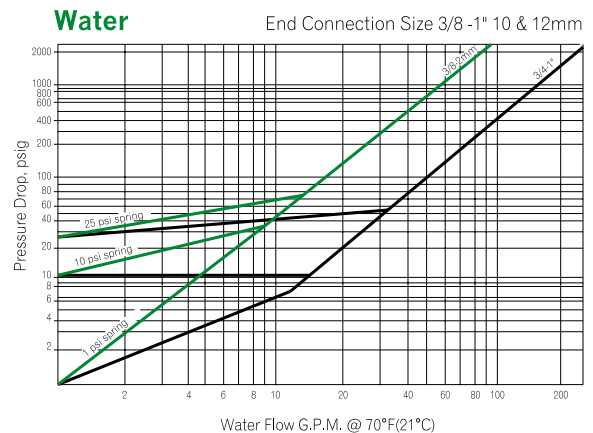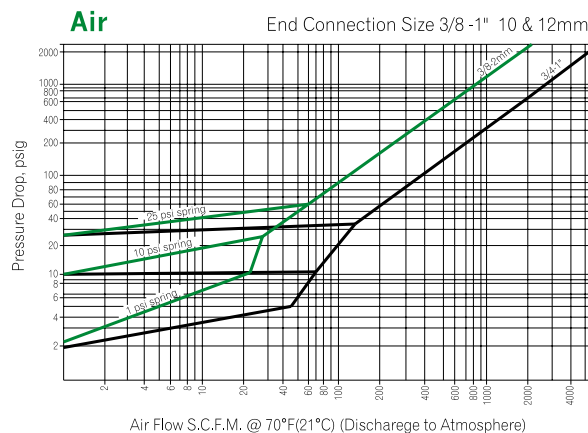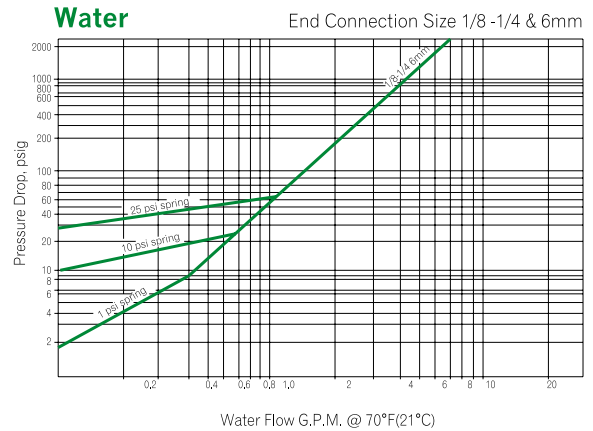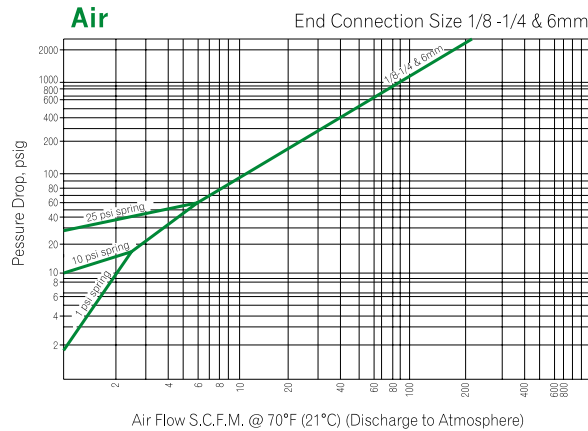

# 700H Series

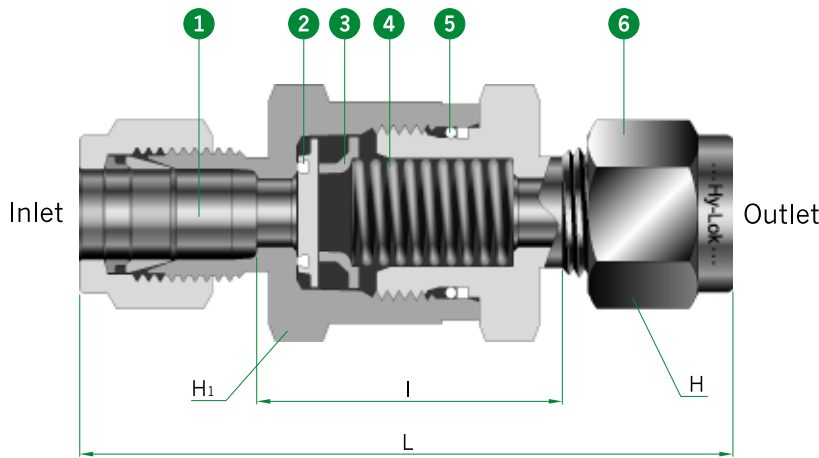

- 1 Orifice**
  - is max. flow design for min. pressure drop.
  - include flow dia from 4.8mm to 15.0mm
- 2 Poppet**
  - provides leak tight shut-off with elastomer seal
- 3 Poppet Stopper**
  - provides minimizes spring stress.
- 4 Springs**
  - are available for the cracking pressure in the range from 1/3psig to 25psig
- 5 O-ring and Back Up Rings**
  - are halves for ensures closure to the rated pressure
- 6 Variety of End Connection**
  - include Hy-Lok tube fittings, male and female NPT, ISO tapered threads, ZCO ends and Matal Gasket Seal ends.

## Technical Data


Series	CVH1	CVH2	CVH3
Max. Working Pressure	6000 psig (413bar)		5000 psig (344bar)
Operating Temperature Range	FKM : -10°F to 375°F (-23°C to 191°C) NBR : -10°F to 250°F (-23°C to 121°C)		
Nominal Cracking Pressure	1/3, 1, 5, 10, 25 psig		

## Table of Dimensions

Basic Part No.	Flow Dia.	Cv	End Connection		Pressure Rating psig (bar)			Dimensions			
			Inlet	Outlet	SS316	Carbon Steel	Alloy 400	L	I	H (Nut Hex)	H1 (Body Hex)
CVH1	4.8	0.67	1/8" Hy-Lok		6000 (413)		5000 (345)	57.7	32.1	11.1	17.5
			1/4" Hy-Lok					61.7	31.2	14.2	
			6mm Male NPT						31.1	14.0	
			1/4" Female NPT					54.1			
			1/8" Male NPT					45.5			
			1/4" Male NPT					55.1			
			1/4" Metal Gasket Seal					57.9			
			1/4" O-Ring Face Seal					50.3			
CVH2	7.8	1.80	3/8" Hy-Lok		6000 (413)		5000 (345)	69.9	36.1	17.5	25.4
			1/2" Hy-Lok					75.2	29.5	22.2	
			8mm Hy-Lok					68.6	36.2	16.0	
			10mm Hy-Lok					71.1	36.7	19.0	
			12mm Hy-Lok		75.2	29.6	22.0				
			3/8" Female NPT		5000 (345)	5300 (365)	5000 (345)	64.8			26.9
			1/2" Female NPT		4600 (316)	4900 (337)	4600 (316)	77.0			
			3/8" Male NPT		6000 (413)	5000 (345)		59.9			
			1/2" Male NPT					69.3			
			1/2" Metal Gasket Seal		3500 (241)	-	-	69.3			25.4
1/2" O-Ring Face Seal		6000 (413)	-	-	59.7						
CVH3	15.0	4.70	3/4" Hy-Lok		5000 (345)		4700 (323)	89.4	40.6	28.6	41.3
			1" Hy-Lok					98.6	36.1	38.1	
			22mm Hy-Lok					88.4	36.4	32.0	
			25mm Hy-Lok					98.6	36.0	40.0	
			3/4" Female NPT		4300 (296)			82.0			
			1" Female NPT		4100 (282)			97.3			
			3/4" Male NPT		5000 (345)		4700 (323)	83.6			
			1" Male NPT					93.2			
			3/4" Metal Gasket Seal		3000 (206)	-	-	96.0			
			3/4" O-Ring Face Seal		5000 (345)	-	-	73.7			
			1" O-Ring Face Seal								

All dimensions in millimeters, reference only subject to change. Dimensions shown with Hy-Lok nuts in finger-tight position, where applicable. (-) blank is not applicable

## Materials of Construction

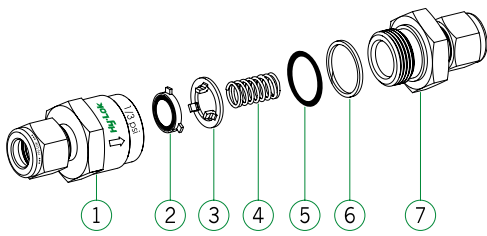


No.	Component	Valve Body Materials
		Material Grade / ASTM Specification
1	Inlet Body	TP316 / A479 or A276
2	Poppet <sup>①</sup>	FKM - bonded TP316 / A479
3	Poppet Stopper	TP316 / A479 or A276
4	Spring	TP302 / A313
5	O-Ring <sup>①</sup>	FKM
6	Back Up Ring	PTFE
7	Outlet Body <sup>②</sup>	TP316 / A479 or A276

① Fluorocarbon-Based.


② Molybdenum dry film lubricant on thread.

## Flow Rate at 70°F (20°C)



### Air (CVH1)

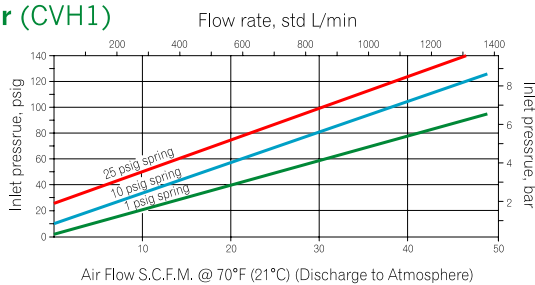

### Air (CVH2)

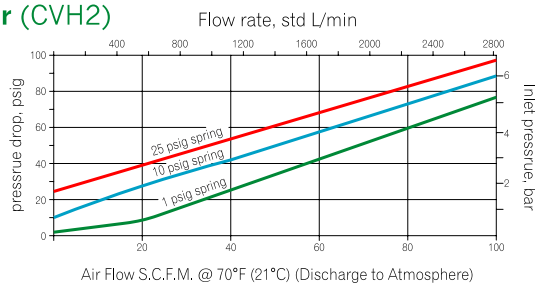

### Air (CVH3)

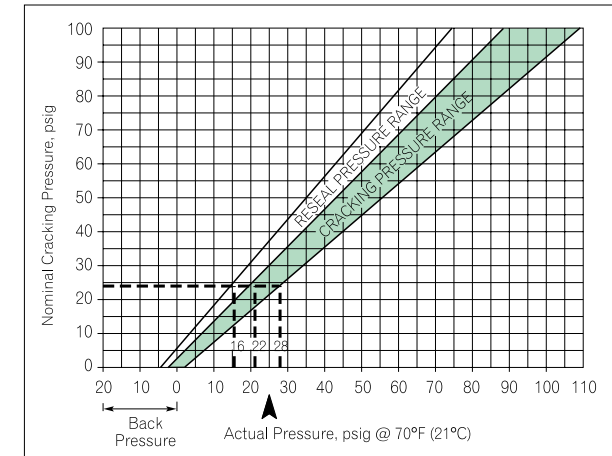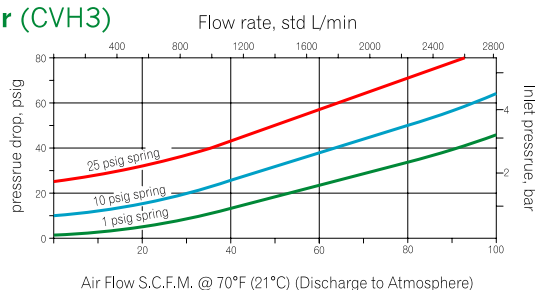


## Cracking and Reseal Pressure

From the graph, the actual cracking pressure of nominal 25psi is shown to range between 22psi to 28psi, and the reseal pressure 16psi to 22psi.


**Back pressure** may be required to reseal the valves with nominal cracking pressure of 5psi or lower.

1. Cracking pressure : The upstream pressure at which the first indication of flow occurs.
2. Reseal pressure : The upstream pressure at which there is no indication of flow.


### Water (CVH1)

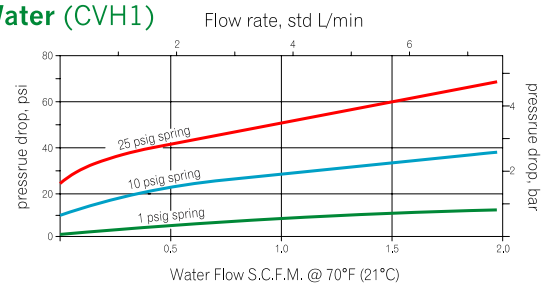


### Water (CVH2)

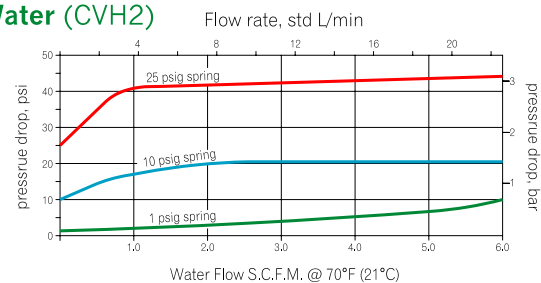


### Water (CVH3)

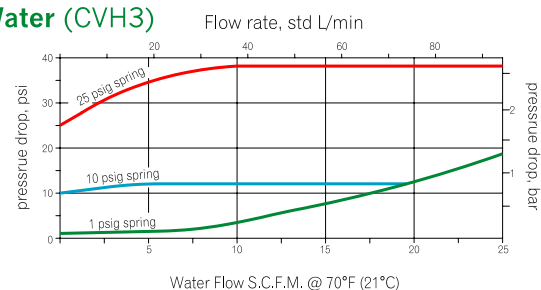

# 701, 700A Series

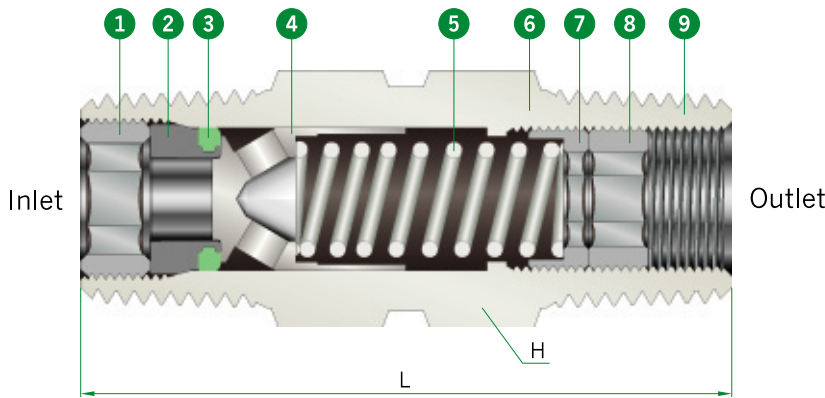

\* 701 Series is without Adjusting screw and locking screw



- 1 Stop nut**
  - helps to contain the insert.
- 2 Insert**
  - prevents blow-out of o-ring.
- 3 O-Ring**
  - provides leak tight shut-off
- 4 Back Stopped Poppet**
  - prevents the spring from being over stressed
- 5 Spring**
  - a wide range of adjustable springs are available for the cracking pressure in the range from 3psig to 600psig.
- 6 One-piece Body**
  - made from bar stock
- 7 Adjusting screw (700A Series Only)**
  - sets desired cracking pressure
- 8 Locking screw (700A Series Only)**
  - maintains setting.
- 9 End Connections**
  - Male & Female ISO tapered threads, Male & Female NPT.

## Technical Data


Series	701	700A
Max. Working Pressure	3000 psig (206bar)	
Operating Temperature Range	FKM : -10°F to 375°F (-23°C to 191°C) NBR : -10°F to 250°F (-23°C to 121°C)	
Nominal Cracking Pressure	1/3, 1, 3, 5, 10, 25 psig	3 to 50 psig 50 to 150 psig 150 to 350 psig 350 to 600 psig

## Table of Dimensions

Basic Part No.	Flow Dia.	End Connections		Dimensions				
		Inlet	Outlet	L		H		
				mm	in.	mm	in.	
Stationary Cracking Pressure								
CV (701 Series)	-M4N	4.8	1/4" Male NPT	1/4" Male NPT	41.1	1.62	14.2	9/16
	-M8N	10.0	1/2" Male NPT	1/2" Male NPT	57.9	2.28	22.2	7/8
	-F4N	4.8	1/4" Female NPT	1/4" Female NPT	61.2	2.41	19.1	3/4
	-F8N	10.0	1/2" Female NPT	1/2" Female NPT	94.2	3.71	26.9	1 1/16
	-FM4N	4.8	1/4" Female NPT	1/4" Male NPT	58.2	2.29	19.1	3/4
	-MF4N		1/4" Male NPT	1/4" Female NPT	44.4	1.75		
-MF8N	10.0	1/2" Male NPT	1/2" Female NPT	71.9	2.83	26.9	1 1/16	
Adjustable Cracking Pressure								
CVA (700A Series)	-M4N	4.8	1/4" Male NPT	1/4" Male NPT	41.1	1.62	14.2	9/16
	-M4R		1/4" Male ISO Tapered	1/4" Male ISO Tapered				
	-F4N		1/4" Female NPT	1/4" Female NPT				
	-M8N	10.0	1/2" Male NPT	1/2" Male NPT	65.0	2.55	22.2	7/8
	-M8R		1/2" Male ISO Tapered	1/2" Male ISO Tapered				

All dimensions in millimeters. Dimensions are for reference only, subject to change.

## Cracking Pressure Adjustment

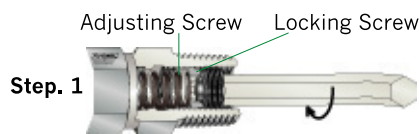

**Step. 1** Insert the hex wrench into the lock screw. Loosen the lock screw by rotating the hex wrench 2 to 3 full turns in the counterclockwise direction.




**Step. 2** After loosening the lock screw, align the hex wrench as it will enter into the adjustment screw. To establish the desired cracking pressure, rotate the hex wrench in a clockwise direction to increase the cracking pressure or rotate the hex wrench in a counterclockwise direction to decrease the cracking pressure.



**Step. 3** After adjusting the adjustment screw to reach the desired cracking pressure, withdraw the hex wrench from the adjustment screw. Tighten the lock screw against the adjustment screw firmly by rotating the hex wrench in a clockwise direction.

After testing for the desired cracking pressure, if additional adjusting is required, repeat steps 1 through 3.

## Materials of Construction

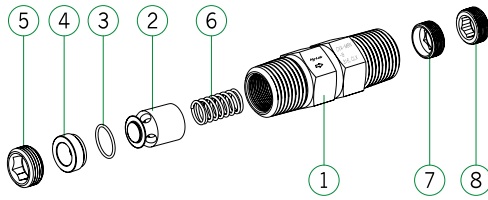

No.	Component	Valve Body Materials		
		316 Stainless Steel	Brass	
			Material Grade / ASTM Specification	
1	Body <sup>①</sup>	TP316 / A479 or A276	Brass	
2	Poppet	TP316 / A479 or A276	Brass	
3	O-ring <sup>②</sup>	FKM	NBR	
4	Insert	TP316 / A479 or A276	Brass	
5	Stop nut	TP316 / A479 or A276	Brass	
6	Spring	SS302 / A313		
7	Adjusting screw <sup>③†</sup>	TP316 / A479 or A276	TP316 / A479 or A276	Brass <sup>③</sup>
8	Locking screw <sup>③†</sup>			


<sup>①</sup> Silicone-based lubricant.

<sup>②</sup> Molybdenum disulfide-based dry film lubricant.

<sup>③</sup> Adjusting screw in brass valve with "C" or "D" (150~600 psig) spring is 316SS.

+ 700A Series only.

## Cracking and Reseal Pressure at 70°F (20°C)

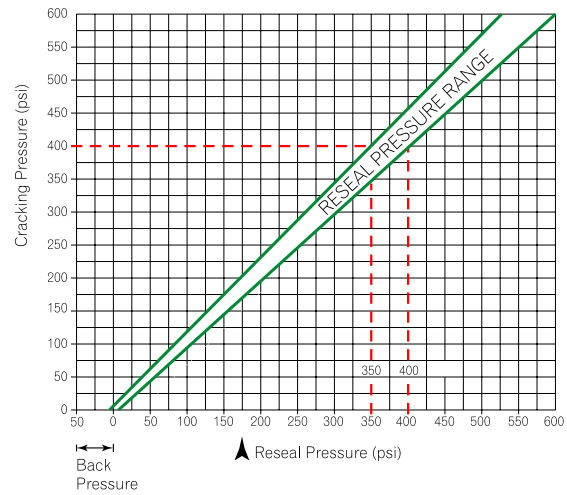





Example : For a valve set to crack at 400 psi, the minimum reseal pressure would be 350psi.

**!** Valves that are not actuated for a period of time may crack initially at higher than subsequent cracking pressure.

701, 700A series check valves set to crack at 20psi or lower may require back pressure to reseal bubble-tight.

1. Cracking pressure : The upstream pressure at which the first indication of flow occurs.
2. Reseal pressure : The upstream pressure at which there is no indication of flow.

## Flow Rate at 70°F (20°C)

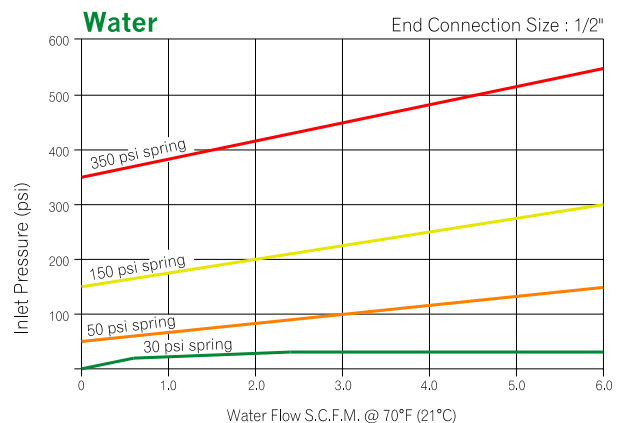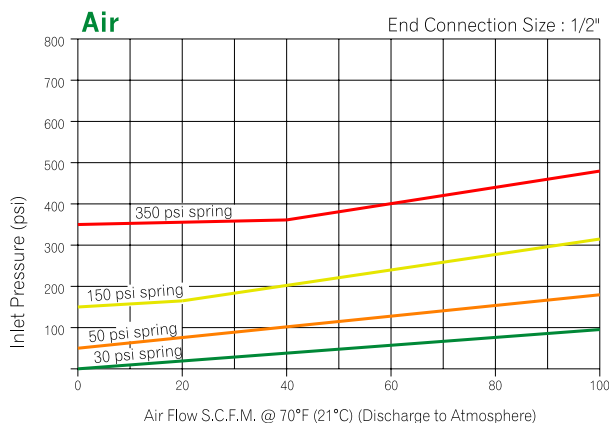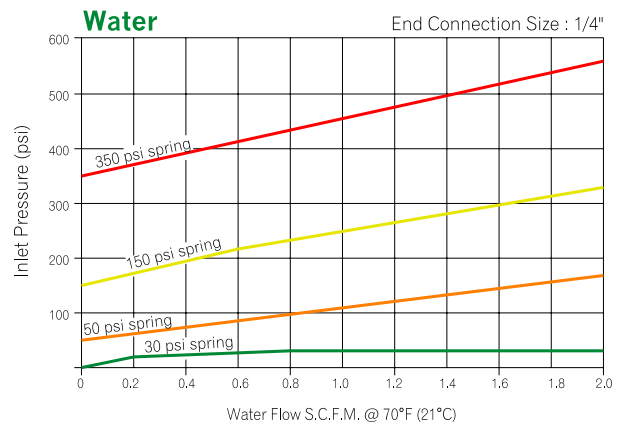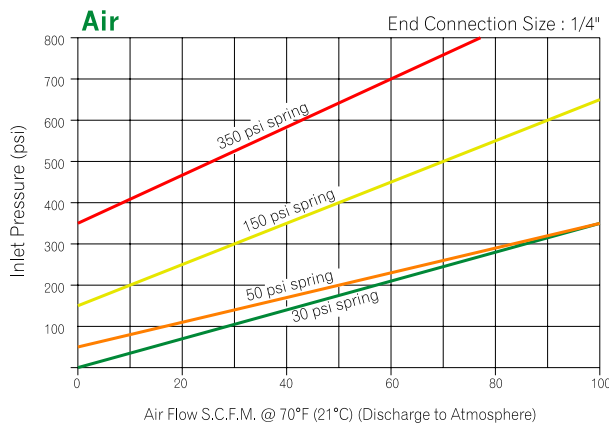

# Check Valves

## Cleaning

- Each valve is cleaned and packaged according to the company standard cleaning procedures.

## Testing

- Each valve is tested with nitrogen for cracking and reseal performance.
- Optional tests are available upon request.


## O - Ring Materials

- Available are various O - ring materials, whose temperature ratings are shown below.

Material	Temperature Rating
FKM	-23°C to 191°C (-10°F to 375°F)
NBR	-23°C to 121°C (-10°F to 250°F)
FFKM (Kalrez®)	-23°C to 315°C (-10°F to 600°F)
PTFE	-46°C to 232°C (-50°F to 450°F)
Neoprene	-40°C to 121°C (-40°F to 250°F)
Ethylene Propylene	-46°C to 149°C (-50°F to 300°F)

\* High back pressure is required for PTFE to seal leak - tight.

## Ordering Information

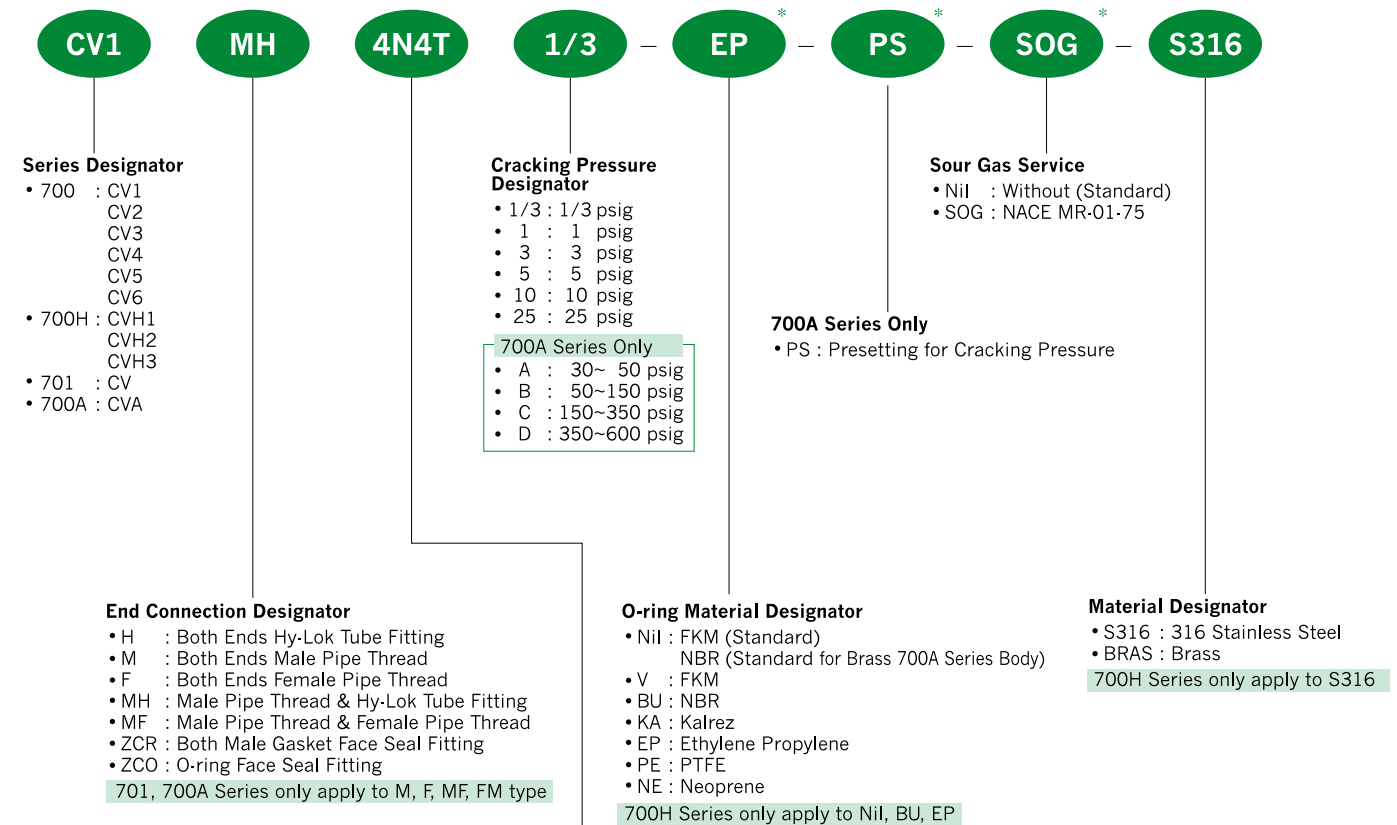

### • Pipe Thread NPT ( ISO / BSP )

Thread(NPS)	1/8	1/4	3/8	1/2	3/4	1
Designator	2N(R)	4N(R)	6N(R)	8N(R)	12N(R)	16N(R)

### • Tube

Fractional Tube	O.D.	1/8"	1/4"	3/8"	1/2"	3/4"	1"
	Designator	2T	4T	6T	8T	12T	16T
Metric Tube	O.D.	3mm	6mm	10mm	12mm	20mm	25mm
	Designator	3M	6M	10M	12M	20M	25M

**Note** \* : No designator is required for standard.  
e.g CVH1H - 4T - 1/3 - S316

701, 700A Series only apply to 1/2" & 1/4"

## SAFETY in VALVE SELECTION


Proper installation, materials compatibility, operation and maintenance of these valves are the responsibility of the user. The total system design must be taken into consideration to ensure optimal performance and safety.





## CVW Series

### All Welded Check Valves

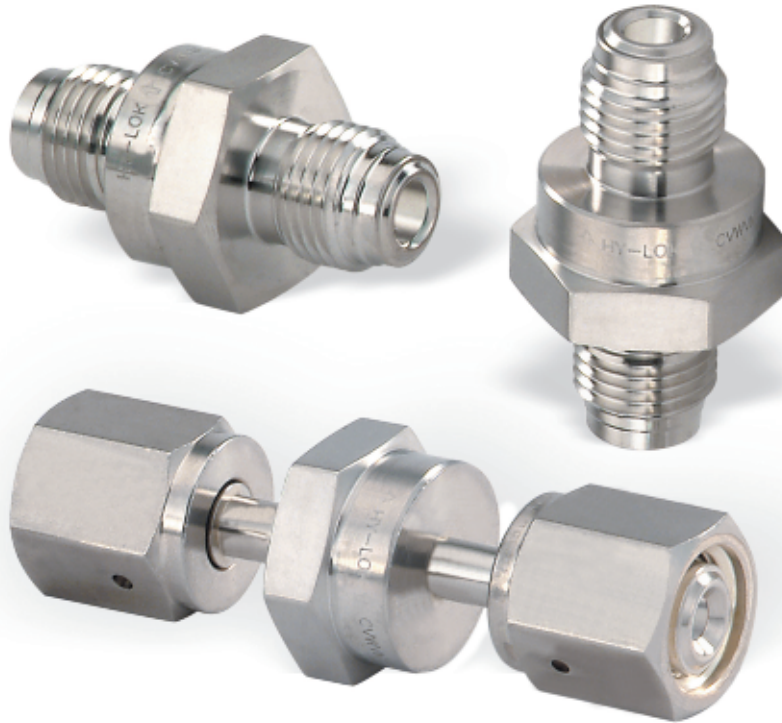


#### Design and Engineering

- All Welded design provides excellent sealing of fluid
- Compact Design
- Maximum working pressure is up to 3000 psig (206bar)
- Temperature rating is up to 400°F (204°C)
- ZCR, tube butt weld, and Hy-Lok tube fitting
- 100% helium leak tested

#### Application

- Semiconductor
- Biotech
- Pharmaceutical
- Ultra-Pure, Flammable, or toxic Fluid line

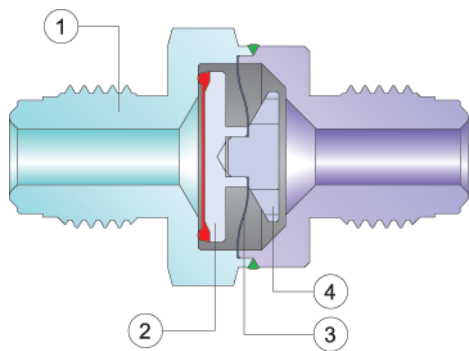

## Material

No.	Description	Material / ASTM Specification
1	Body	Single Vacuum Melt 316L / A479
2	Poppet	Type 316 / A479
3	Spring	Elgiloy / AMS5876
4	Stopper	Type 316 / A479

## Specification

Cracking Pressure	Max. Pressure Drop	Pressure - Temperature Ratings	
		Temperature F°(°C)	Working Pressure psig (bar)
Less than 2 psig	145 psig	-10(-23) to 100( 37)	3000(206)
		200( 93)	2530(174)
		300(148)	2270(156)
		400(204)	2065(142)

## Cleaning & Testing

Passivation is done at Nitrogen environment. Fine cleaning is one by Ultrasonic cleansing with resistivity over 18MΩ. D.I water after finishing the passivation. Inboard helium leak tested to a rate of  $4 \times 10^{-9} \text{ cm}^3 / \text{s}$ .

## Assembly & Packaging

Assembly and Packaging is performed in the clean room of Class 10. Valves are packed with anti-static polyethylene bag that is pressured into the high purity nitrogen gas.

## Internal Surface Grade


Grade	Designator	Roughness Average Ra. (E.P)	Packing Standard Class 10
B.A.	B	0.25 $\mu\text{m}$ (10 $\mu\text{in}$ )	Double
High	H	0.13 $\mu\text{m}$ ( 5 $\mu\text{in}$ )	

• Grade "B.A." is standard.

## Dimensions

All Dimensions are in millimeters, except for the O.D size.

In case of the end connection for Hy-Lok tube fitting, dimensions shown with Hy-Lok nuts in finger-tight position, where applicable.

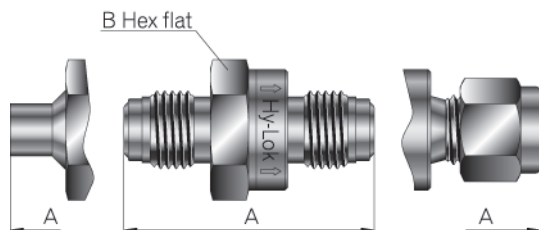

End Connection	Ordering No.	Size	Cv	A	B	
Male ZCR Fitting	CVWVM-4	1/4"	0.7	45.7	22.2 (7/8")	
	CVWVM-8	1/2"		52.3		
Hy-Lok Tube Fitting	CVWH-4	1/4"	0.55	49.8		
	CVWH-6M	6mm				
Female ZCR Fitting	CVWVF-4	1/4"	0.7	53.8	25.4 (1")	
	CVWVF-8	1/2"				
Tube Butt Weld	CVWBW-4	1/4"	0.55	31.5	22.2 (7/8")	
	CVWBW-6	3/8"				
	CVWBW-8	1/2"	0.7			
	CVWBW-6M	6mm				

## Ordering Informations

**CVW**

Series Designator  
• CVW - All Welded Check Valve

**BW**

End Connection Designator  
• VM - Male ZCR Fitting  
• BW - Tube Butt Weld  
• H - Hy-Lok Tube Fitting  
• VF - Female ZCR Fitting

**4**

Size Designator  
• 4 - 1/4"  
• 6 - 3/8"  
• 8 - 1/2"

**H**

Surface Grade Designator  
• Nil - Grade "B.A"  
• H - Grade "High"

**SM6L**

Body Material Designator  
• SM6L - Single Vacuum Melt 316L ASTM A479

### ■ QUALITY SYSTEM CERTIFICATES



ISO 9001  
CERTIFICATE NO. GQC 212

ASME SECT III (MO)  
CERTIFICATE NO. QSC 584

### ■ TYPE APPROVALS (for Hy-Lok Tube Fittings)



American Bureau Shipping  
CERTIFICATE NO. 05-BK576227-X



Lloyd's Register  
CERTIFICATE NO. 01/10075



GERMANISCHER LLOYD  
CERTIFICATE NO. 40297-01HH



DET NORSKE VERITAS  
CERTIFICATE NO. P-10432

### SAFETY in VALVE SELECTION

Proper installation, material compatibility, operation and maintenance of the valves is the responsibility of the user. The total system design must be taken into consideration to ensure optimal performance and safety.




Distributed by :

# Hy-Lok CVL Series

## Lift Check Valves



Catalog No. H-CVL100  
Jan. 2007

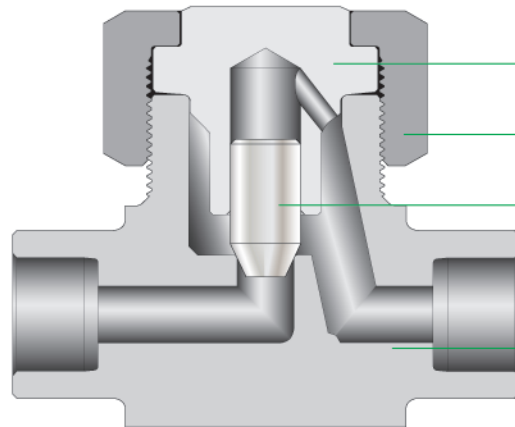

- **BONNET**  
Union Bonnet Design For Safety
- **BONNET NUT**
- **POPPET**  
Metal to Metal Seal
- **BODY**  
Compact Size & Rugged Construction



### Features

- **pressure rating** up to 6000 psig (413 bar) @70 °F(21 °C)
- **Temperature rating** from -65 °F to 900 °F (-53 °C to 482 °C)
- Variety of end connection sizes, including Hy-Lok Tube Fittings, female NPT and weld ends.
- **Body materials** available in 316 Stainless steel
- No Spring or Elastomers
- **100 % Factory tested**

### Technical Data

Valve Series	Orifice		Cv	Pressure Rating @ 70 °F (21 °C)	Temperature Rating
	mm	in.			
CVL1 Series	4.0	0.157	Max. 0.28	6000 psig (413 Bar)	-65 °F to 900 °F (-53 °C to 482 °C)
CVL2 Series	6.4	0.252	Max. 0.60		
CVL3 Series	11.1	0.437	Max. 2.30		


### Flow Data at 100°F (37°C)

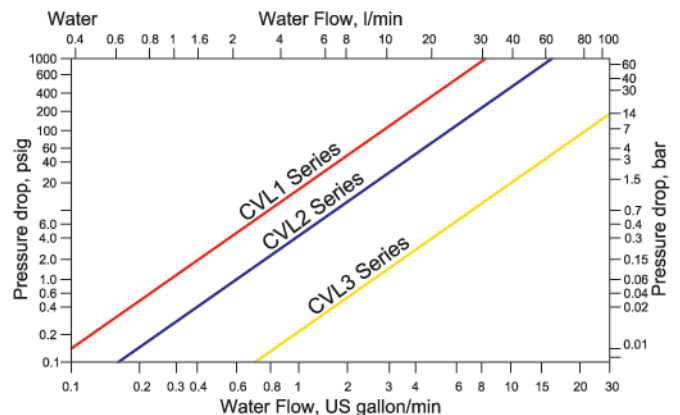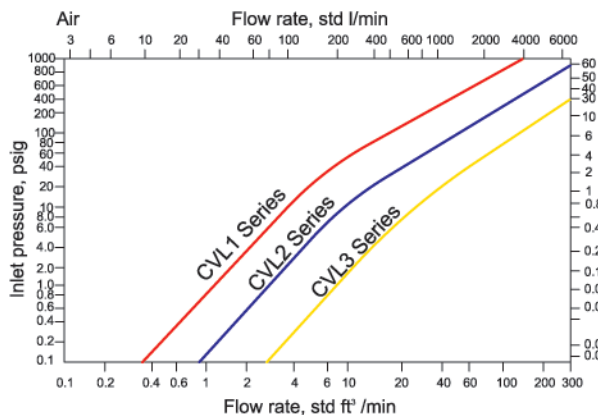


**HY-LOK CORPORATION**

©2007 HY-LOK CORPORATION All rights reserved

## Materials of Construction

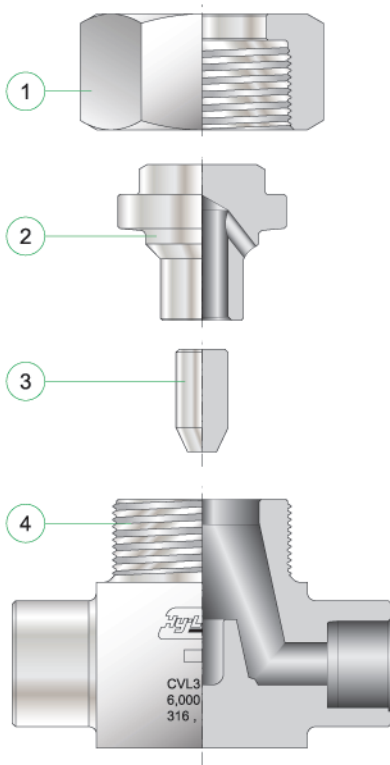

Item No	Component	Material
1	Bonnet Nut	ASTM A276/A479 TYPE 316
2	Bonnet	
3	Poppet	ASTM A564 TYPE 630
4	Body	ASTM A276/A182 TYPE 316

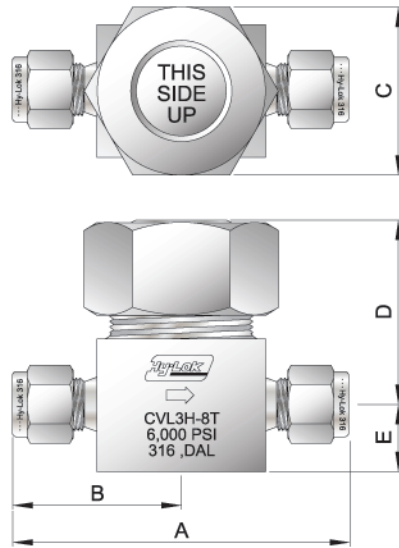

## Table of Dimensions

Basic Part NO.		End Connection		Cv	Orifice mm (in.)	Dimensions, mm (in.)				
Series	Part. NO.	Inlet	Outlet			A	B	C	D	E
CVL1	H-4T	1/4" Hy-Lok	1/4" Hy-Lok	0.28	4.0 (0.157)	61.9(2.44)	31.0(1.22)	22.2 (7/8)	37.3 (1.47)	9.6 (0.38)
	H-6M	6mm Hy-Lok	6mm Hy-Lok			50.8(2.00)	25.4(1.00)			
	F-2N	1/8" Female NPT	1/8" Female NPT			52.4(2.06)	26.2(1.03)			
	F-4N	1/4" Female NPT	1/4" Female NPT			46.0(1.80)	23.0(0.90)			
	SW-4T	1/4" Tube Weld	1/4" Tube Weld							
CVL2	F-4N	1/4" Female NPT	1/4" Female NPT	0.60	6.4 (0.252)	57.2(2.24)	28.6(1.12)	31.8 (1 1/4)	47.0 (1.85)	12.7 (0.50)
	F-6N	3/8" Female NPT	3/8" Female NPT			73.0(2.25)	36.5(1.25)			
	H-6T	3/8" Hy-Lok	3/8" Hy-Lok			57.2(2.25)	28.6(1.125)			
	SW-6T	3/8" Tube Weld	3/8" Tube Weld							
	SW-8T	1/2" Tube Weld	1/2" Tube Weld							
CVL3	H-8T	1/2" Hy-Lok	1/2" Hy-Lok	2.30	11.1 (0.437)	100.0(3.94)	50.0(1.97)	38.1 (1 1/2)	62.0 (2.44)	20.0 (0.79)
	H-12T	3/4" Hy-Lok	3/4" Hy-Lok			79.4(3.12)	39.7(1.56)			15.9 (0.63)
	F-8N	1/2" Female NPT	1/2" Female NPT			82.6(3.26)	41.3(1.63)			
	F-12N	3/4" Female NPT	3/4" Female NPT			79.4(3.12)	39.7(1.56)			
	SW-8T	1/2" Tube Weld	1/2" Tube Weld							

All dimensions in millimeters, reference only subject to change. Dimensions shown with Hy-Lok nuts finger-tight position, where applicable.

### QUALITY SYSTEM CERTIFICATES



ISO 9001  
CERTIFICATE NO. GQC 212

ASME SECT III (MO)  
CERTIFICATE NO. QSC 584

### TYPE APPROVALS (for Hy-Lok Tube Fittings)



American Bureau Shipping  
CERTIFICATE NO. 00-BK50288-X



Lloyd's Register  
CERTIFICATE NO. 01/10075



GERMANISCHER LLOYD  
CERTIFICATE NO. 57798-91 HH



DET NORSKE VERITAS  
CERTIFICATE NO. P-9100

### SAFETY in VALVE SELECTION

Proper installation, material compatibility, operation and maintenance of the valve is the responsibility of the user. The total system design must be taken into consideration to ensure optimal performance and safety.



Distributed by :

www.hy-lok.com

# Hy-Lok RV Series

## Relief Valves


Catalog No. H-RV100  
Jan. 2002

**RV 1  
Series**

**Low Pressure Relief Valve**

**High Pressure Relief Valve**

**RV 2  
Series**

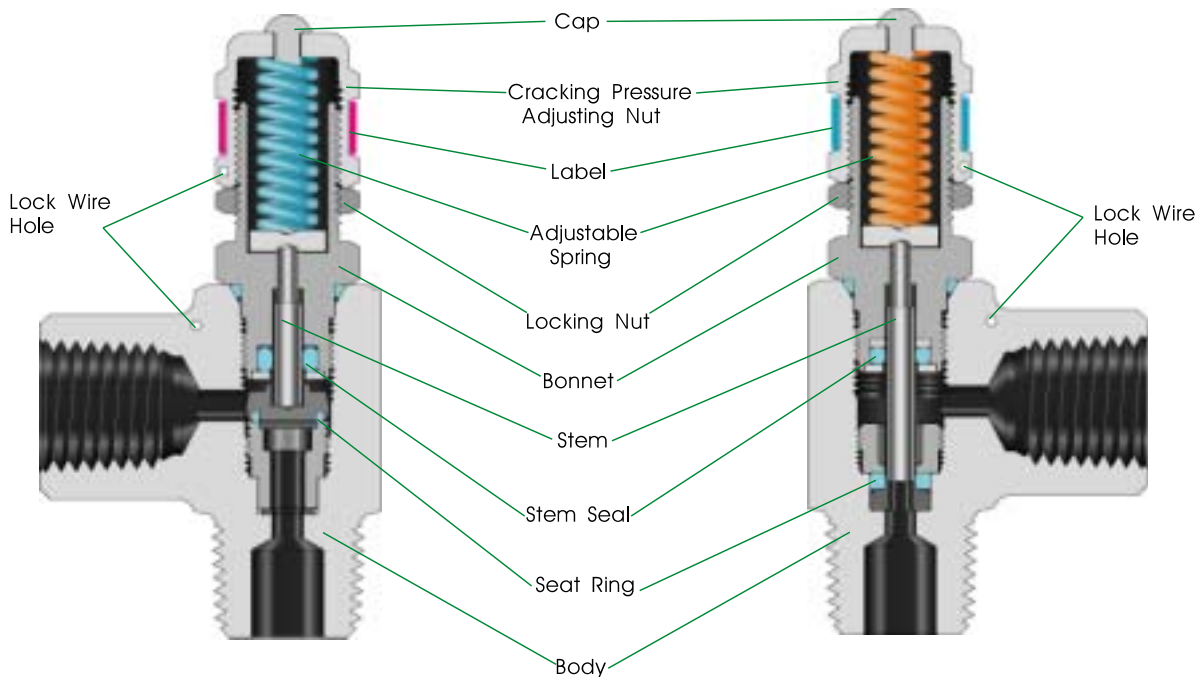

### Technical Data

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• <b>Cracking Pressure Range</b> : 10~250psig to atmosphere</li> <li>• <b>Max.Working Pressure</b> : 300psig</li> <li>• <b>Operating Temperature Range</b> : -10°F~400°F(-23°C~204°C)</li> <li>• <b>Orifice Size</b> : 4.8mm (0.19in)</li> <li>• <b>One Spring</b> adjustable over entire cracking pressure range, blue-color spring standard</li> <li>• <b>Cracking Pressure</b> is affected by the outlet pressure</li> </ul> | <ul style="list-style-type: none"> <li>• <b>Cracking Pressure Range</b> : 225~6000psig to atmosphere</li> <li>• <b>Max.Working Pressure</b> : 6000psig</li> <li>• <b>Operating Temperature Range</b> : -10°F~400°F(-23°C~204°C)</li> <li>• <b>Orifice Size</b> : 4.8mm (0.19in)</li> <li>• <b>Various Springs</b> are available as below mentioned.</li> <li>• <b>Cracking Pressure</b> is not affected by the outlet pressure.</li> </ul> |
|--|--|

### Features

- **Compact body** for installation in small space
- **Cracking pressure** adjustable externally
- **Lock wire capability** to maintain pressure relief setting
- **100% factory tested** crack and reseal performance

### Materials of Construction

- Body Material : Stainless Steel 316 (standard)
- Seal : Viton (standard)
- Spring : SS631 (standard)
- Cap : Polypropylene (standard)

### Valve Operation and Adjusting Cracking pressure

To increase the cracking pressure, turn the cracking pressure adjusting nut clockwise making the spring more compressed.

### RV2 Series Spring and Cracking Pressure

Spring Designator	Cracking Pressure			
	psig	bar	kPa	Color
A	225 - 750	15.5 - 51.5	1550 - 5150	Yellow
B	750 - 1500	51.5 - 103	5150 - 10300	Purple
C	1500 - 2250	103 - 155	10300 - 15500	Orange
D	2250 - 3000	155 - 206	15500 - 20600	Brown
E	3000 - 4000	206 - 275	20600 - 27500	White
F	4000 - 5000	275 - 344	27500 - 34400	Red
G	5000 - 6000	344 - 414	34400 - 41400	Green


#### CAUTION

RV Series Relief Valves are not "Safety Accessories" as defined in the Pressure Equipment Directive 97/23/EC.



**HY-LOK CORPORATION**

©1998, 2000, 2002 HY-LOK CORPORATION All rights reserved

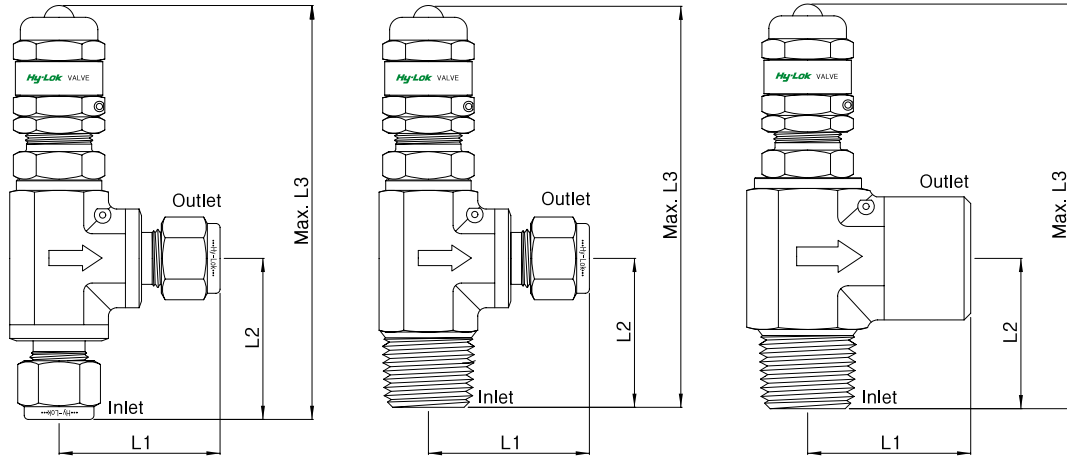

## Table of Dimensions

Basic Part No.			Orifice	End Connections		Dimensions		
				Inlet	Outlet	L1	L2	L3
RV1 or RV2	H	-4 T-	4.8	1/4" Hy-Lok	1/4" Hy-Lok	38.7	37.3	104.6
	H	-6M-		6mm Hy-Lok	6mm Hy-Lok			
	H	-8M-		8mm Hy-Lok	8mm Hy-Lok			
	H	-8 T-		1/2" Hy-Lok	1/2" Hy-Lok	46.7	46.7	114.0
	H	-12M-		12mm Hy-Lok	12mm Hy-Lok			
	MH	-8N8T-		1/2" Male NPT	1/2" Hy-Lok			
	MH	-8N12M-		1/2" Male NPT	12mm Hy-Lok	30.0	35.7	103.0
	MF	-4N-		1/4" Male NPT	1/4" Female NPT			
	MF	-6N-		3/8" Male NPT	3/8" Female NPT			
MF	-8N-	1/2" Male NPT	1/2" Female NPT	34.5	32.2	99.5		
				38.0			35.7	103.0

All dimensions are in millimeters.

## Ordering Information

**RV2**

**Series Designator**

- RV1 : Low Pressure
- RV2 : High Pressure

**MH**

**End Connection Designator**

- H : Both End Hy-Lok Tube Fitting
- MH : Male Pipe Thread & Hy-Lok Tube Fitting
- MF : Male Pipe Thread & Female Pipe Thread

**8N**

**Size Designator**

Inlet Outlet

**8T**

**B**

**Spring / Cracking Pressure Designator\***

- A : 225 - 750 psig
- B : 750 - 1500 psig
- C : 1500 - 2250 psig
- D : 2250 - 3000 psig
- E : 3000 - 4000 psig
- F : 4000 - 5000 psig
- G : 5000 - 6000 psig

**S316**

**Body Material Designator**

- S316 : 316 Stainless Steel

• NPT (ISO/BSP)

• Tube

Thread(in.)	1/4	3/8	1/2
Designator	4N(R)	6N(R)	8N(R)

Fractional Tube	O.D.(in.)	1/4	3/8	1/2
	Designator		4T	6T
Metric Tube	O.D.(mm)	6	8	12
	Designator		6M	8M

**Note \*** : No spring / cracking pressure designator is required for RV1 low pressure series valves.

### QUALITY SYSTEM CERTIFICATES



ISO 9001  
CERTIFICATE NO.QQC 212

ASME SECT III (MO)  
CERTIFICATE NO. QSC 584

### TYPE APPROVALS (For Hy-Lok Tube Fittings)



American Bureau Shipping  
CERTIFICATE NO.00-BK50288-X



Lloyd's Register  
CERTIFICATE NO.01/10075



GERMANISCHER LLOYD  
CERTIFICATE NO.57798-91 HH



DET NORSKE VERITAS  
CERTIFICATE NO.P-9100

## SAFETY in VALVE SELECTION

Proper installation, materials compatibility, operation and maintenance of these valves are the responsibility of the user. The total system design must be taken into consideration to ensure optimal performance and safety.



Distributed by :

www.hy-lok.com